


Art.: 70176

Colector de distribución AISI 304 / Distribution manifold AISI 304

Características	Features
1. Construcción en acero inoxidable AISI 304L deformado en frío	1. AISI 304L stainless steel pipe deformed by cold pressing
2. Tubo principal de 45mm x 1,2mm	2. Main pipe of 45mm x 1,2mm
3. Soldadura TIG sin aporte de material	3. Welding with TIG without additional material
4. Tratamiento superficial decapado y electro pulido	4. Surface treatment degreasing, pickling and electro polishing
5. Presión nominal 10 bar (PN10)	5. Nominal pressure 10 bar (PN10)
6. Temperatura de trabajo 110°C	6. Working temperature 110°C
7. Extremos roscados hembra de G 1" s/ ISO 228/1	7. Threaded ends G 1" female acc/ ISO 228/1
8. Conexiones en derivación bilaterales rosca hembra de G 1/2" según ISO 228/1	8. Bilateral branch connections G 1/2" female thread acc/ ISO 228/1

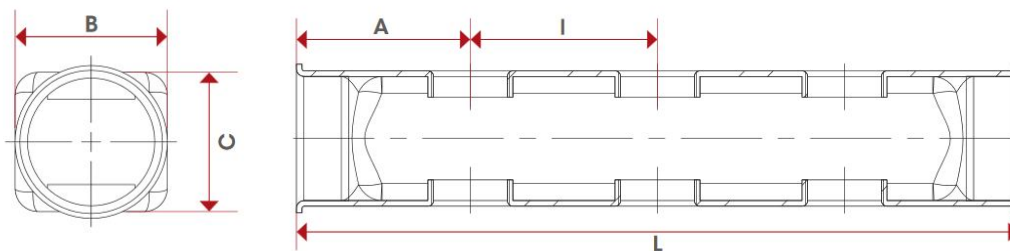

Ref. ITAP	Tubo principal / Main pipe	Nº salidas / Outlets Nº	Dimensiones / Dimensions (mm)					Peso / Weight (Kg)
			A	B	C	I	L	
70176 06 04	45 mm	4	45	39.5	36	50	243	0,380
70176 06 05	45 mm	5	45	39.5	36	50	293	-
70176 06 06	45 mm	6	45	39.5	36	50	343	0,530
70176 06 07	45 mm	7	45	39.5	36	50	393	-
70176 06 08	45 mm	8	45	39.5	36	50	443	-