


Druckluftwerkzeuge | Druckluftmotoren

- ESR 38-520 for rubbing and deburring of drill holes and intersections



Technical Data

Type	ESR 38 -520
Article Nr.	29948435
Air supply	lubricated
Free speed	520 min ⁻¹
Power	380 Watt
Radial deflection	+/- 4°
Axial compliance	- mm
Exhaust air	to front
ER collet	6 mm
Radial compliance of coupling	-
Radial off-set of coupling.	- mm
Compliance force range	18 - 75 N
Force of compliance max.*	200.00 N
Direction of rotation	clockwise
Start-up	-
Noise level	80 dB(A)
Air consumption	8.3 ls
Weight	4.90 kg
Connection air supply (hose) ø inside outside	10 12
Accessories supplied	Wrench
All data related to 6.3 bar working pressure. Subject to technical alterations.	

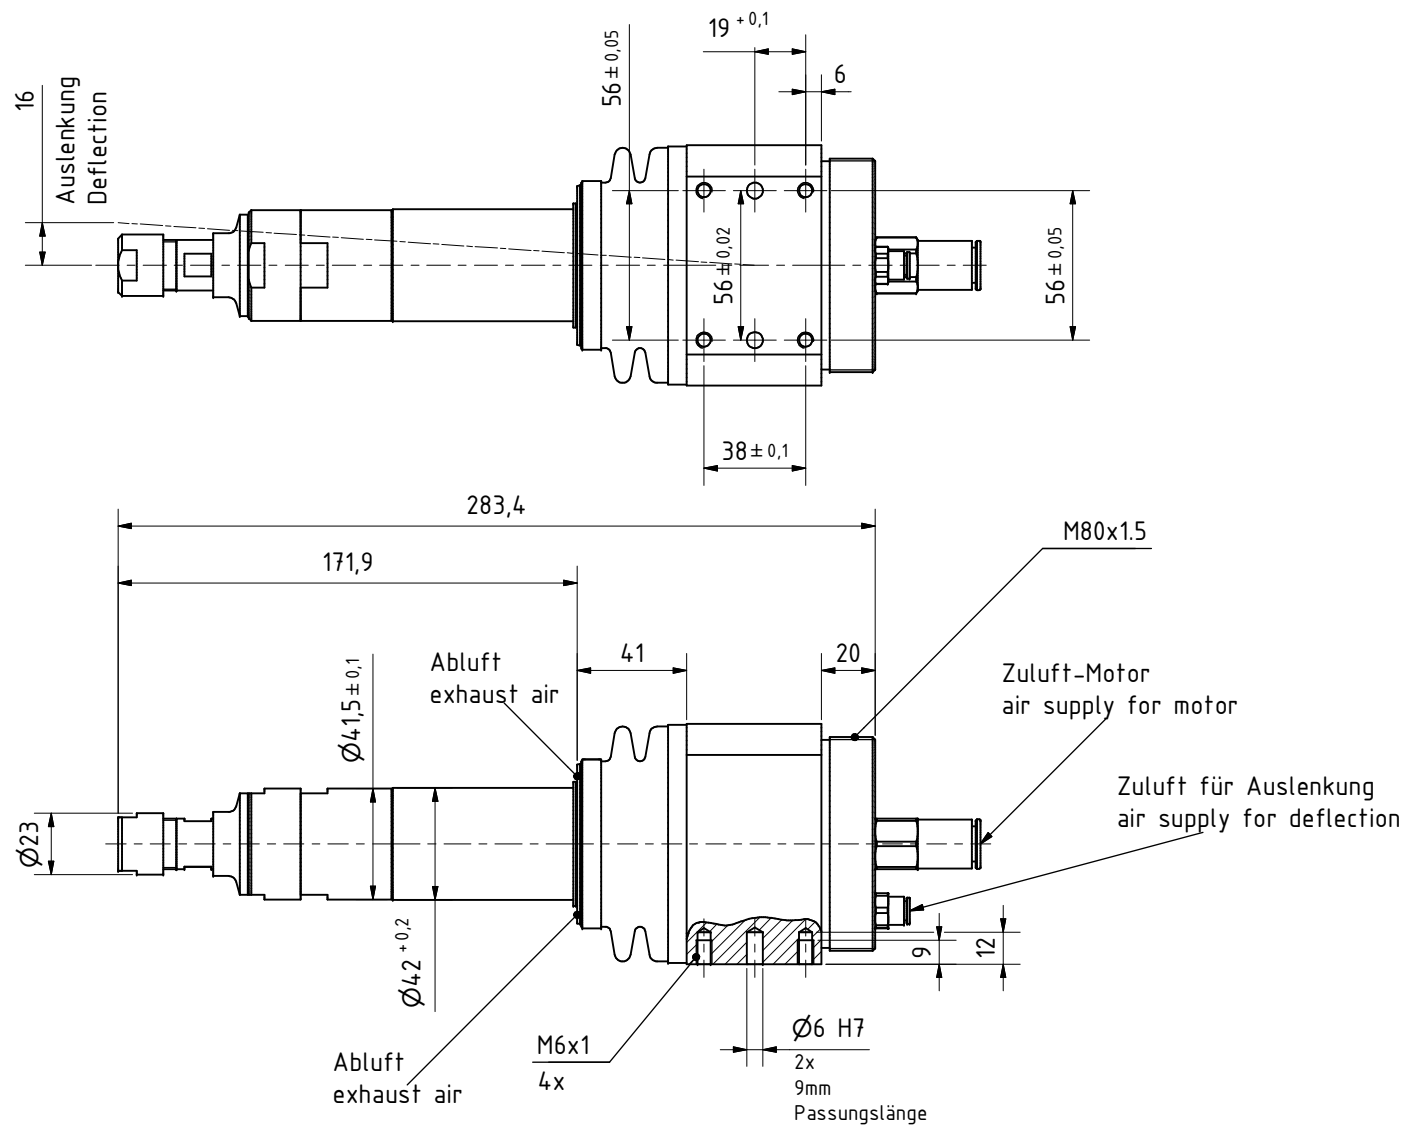

MANNESMANN DEMAG				Allgemein- toleranzen		Oberflächen- DIN EN ISO		Maßstab 1:2		ESR 38-520	
				DIN ISO 2768-mH		1302		Werkstoff			
					Datum	Name		Roboterspindel			
				gez.	15.12.2014	E.Koch					
				gepr.	17.02.2015	Peskos					
								29948435			
4	6510	12.02.2015	E.Koch								
Zust. Änd.-Nr. Datum Name								Blatt 2			
Ersatz für:											